



Visit us at swisherinc.com

ATV Tire Chain Assembly Instructions

Follow directions for installing chains

Apply as tightly as possible by hand for maximum life

Make certain tire chains are properly sized for your tires

1. Lay chains out flat and remove any tangles. When chains are placed on tires, the V-bars should face out and cross chain hooks eyes must face up. DAMAGE to your tires could result if not installed properly. See Figure 1.
2. Lay chain over tire with cross chain hook eyes up and fastener on outside of tire. Tuck the first cross chain (side chain ends without fasteners) under tire. See Figure 2.
3. Move vehicle until fastener is axle high. See Figure 3.
4. Fasten inside hook to proper link of inner side chain so that chain will be straight across tire tread. See Figure 4.
5. Remove slack and hook outside fastener. Make chain as tight as possible by hand without the use of tools. Drive approximately 1/2 mile, stop and retighten. See Figure 5.




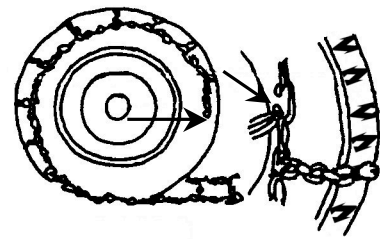


Figure 4

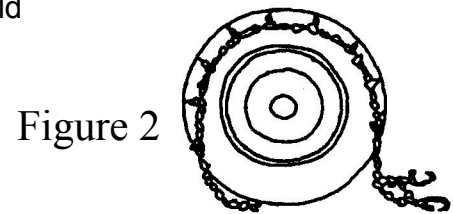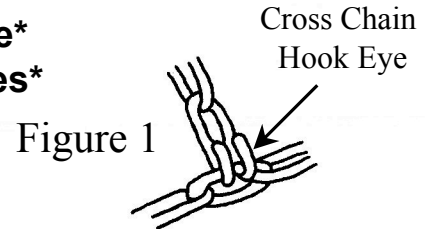

★ ★ ★ CAUTION ★ ★ ★

Check owner's manual for correct tire pressure.
 Maintain a snug fit throughout use.
 Adjust periodically to keep cross chains straight across tire.
 Excess links of side chain may be removed or tied out of the way.

ACCELERATE SLOWLY!
DO NOT EXCEED 5 MPH!

Avoid locking wheels when braking.
 Remove tire chains on bare roads.
 Avoid hitting curbs with tire chains on.

1602 Corporate Dr. PO Box 67 Warrensburg, MO 64093
 Phone: 660.747.8183 Fax: 660.747.8650